

SURFACE PUMPS :



- Available in single and 3 phase models
- Fully compatible with Hydrovar and Teknospeed. Can be factory fitted on request
- Power rated from 0.3 kw to 9kw
- Multistage and single stage models available
- Single stage models up to 110 meter head
- Multi stage models up to 500 meter head
- Maximum operating pressure: 63bar
- Temperature of pumped liquid from -10°C to 140°C

Applications :

- Residential-water
- Commercial-water
- Light industry-water
- Irrigation- water

SURFACE PUMPS MULTISTAGE PUMPS:



- Stainless Steel Vertical Multi-stage Pumps
- A range of flange arrangements
- Delivery up to 250 m³/h
- Head: up to 330 meters
- Fully compatible with Hydrovar (Can be factory fitted on request)
- Available in single and 3 phase models
- Power: from 0.25kW up to 45kW
- Temperature of pumped liquid from -10°C to 140°C
- Maximum operating pressure 40 bar

CLEAN WATER PACKAGE SETS



- Twin pump fixed speed booster sets
- Three pump fixed speed booster sets
- Pump sets with variable speed available on request
- Packaged sprinkler set - Series Hydroquench
- Firefighting booster sets
- Teknospeed and Hydrovar compatible
- Pressurisation sets

SUBMERSIBLE PUMPS:



- Clean and dirty water applications
- Available in single and 3 phase models
- Delivery: up to 30 m³/h
- Up to a Maximum immersion depth: 25 meter
- Temperature of pumped liquid up to 50°C
- Single phase models are available with paddle or tube float switches
- Head up to: 80 meter

GRINDER AND MACERATING PUMP SUBMERSIBLE PUMPS

- The grinder is able to macerate all the solids present in the sewage and to pass it through small discharge pipes (25 mm diameter)
- DOMO series, stainless steel electric pumps, are available with twin-channel or vortex impeller
- Designed to handle suspended solids up to 50 mm

BORE HOLE PUMPS:



- Available in single and 3 phase models
- Maximum immersion depth 300 meters
- Temperature of pumped liquid up to 60°C
- Power from 0.25kW up to 300kW
- Head of water up to 700 meters
- Delivery up to 520 m³/h
- Maximum operating pressure up to 80 bar
- Stainless steel outer and inner construction for longevity
- Pump diameter from 3" to 12"
- Accessories available - including cable, waterproof cable joint kits, lowering wire and chain and control panels for borehole pumps

Applications :

- Light industry-water
- Residential-water
- Agriculture - irrigation
- Golf/turf - irrigation
- Municipality - water



HYDROVAR AND TEKNOSPEED



The single-phase Hydrovar Water-cooled and Teknospeed variable speed electric pumps are designed for residential applications as they provide all the comfort and advantages of constant pressure in the home. The Teknospeed series comprises a frequency converter integrated into the pump which adjusts motor speed so as to constantly provide users with the same pressure, even when demand for water changes.



Ideal for use in greenhouses and stock watering, very economical to run. The range has a large number of models and pump types:



- Horizontal pumps: HVW/HMZ, HVW/BG, HVW/CEA-CA
- Horizontal and vertical pumps: TKS/HMZ, TKS/BG, TKS/CEA-CA, TK/SV.
- Single pump or two-pump pressure booster units: GTKS20/HMZ, GTKS20/BG, GTKS20/CA, GTKS20/SV
- Hydrovars are easily fitted to Residential and irrigation systems

ELECTRIC PUMP CONTROL AND PROTECTION SYSTEM



Genyo, the new range of compact electronic devices, pressure/flow switches for control and protection of electric pumps. Genyo is controlled by an electronic counteracting spring system integrated with flow and pressure sensors. Genyo enables automatic control of pump start-up and shutdown based on actual water demand preventing any pressure fluctuations at delivery points with constant operating point. Genyo integrates multiple system controls into a single device. Available in two versions: 8A with three fixed starting pressures (GENYO 8A), and 16A with automatic restart (GENYO 16A)



Genyos are easily fitted to Residential and irrigation systems at a low cost.

PRESSURE VESSELS



Models:
V = Vertical
H = Horizontal

| Vessels | | | | Spare Membranes | |
|--------------|--------|---------|---------|-----------------|---------|
| Catalogue No | Model | Connect | Price £ | Catalogue No | Price £ |
| 75-05-25 | 20L V | 1" | 34.30 | 75-15-25 | 21.60 |
| 75-05-60 | 60L V | 1" | 126.00 | 75-15-60 | 63.80 |
| 75-05100 | 100L V | 1" | 214.20 | 75-15100 | 80.90 |
| 75-05200 | 200L V | 1 1/2" | 360.80 | 75-15200 | 155.10 |
| 75-05300 | 300L V | 1 1/2" | 453.30 | 75-15300 | 224.40 |
| 75-05500 | 500L V | 1 1/2" | 738.50 | 75-15500 | 380.80 |
| 75-06-25 | 20L H | 1" | 38.70 | 75-16-25 | 20.60 |
| 75-06-60 | 60L H | 1" | 130.60 | 75-16-60 | 60.70 |
| 75-06100 | 100L H | 1" | 218.90 | 75-16100 | 80.90 |

Spare Flanges Available

PRESSURE SWITCHES



| Catalogue No | Model | Price £ |
|--------------|---------------|---------|
| 75-25-15 | 5 Bar | 15.60 |
| 75-25-55 | 10 Bar | 19.80 |
| 75-25-70 | Danfoss 8 Bar | 94.50 |

FLOAT SWITCHES



ST

| Catalogue No | Model | Price £ |
|--------------|--------------|---------|
| 72200-10 | ST FI Single | 55.60 |
| 72210-10 | AMOS Dual | 54.70 |



AMOS

BRAIDED HOSES



| Catalogue No | Model | Price £ |
|--------------|-------|---------|
| 72-30-60 | 60cm | 19.50 |
| 72-30-80 | 80cm | 21.50 |
| 72-30100 | 100cm | 23.60 |





All housings are moulded in Glass Reinforced Plastic (GRP) composite using self-extinguishing, fire retardant resin, tested to BS476: Part 7, Class 2.

All housings offered as standard:

- Cylinder night latch lock or Stainless steel hasp & staple for your own padlock.
- Other locks are available on request.
- 316 Stainless steel Hinges.
- 18mm WBP treated hardwood plywood mounting backboards.
- Doors are reinforced to provide a high level of security and are dust and weather proofed to IP54.
- Cabinets have a semi-gloss surface and standard colours are from the BS4800 range: GREEN (14-C-39) and GREY (10-A-07).

Additional colours are available upon request from the BS4800 and RAL range

STANDARD SINGLE DOOR RANGE

- All the single door range have an integral GRP membrane floor.



| Catalogue No | Width (mm) | Depth (mm) | Height (mm) |
|--------------|------------|------------|----------------|
| GRP1 | 460 | 300 | 610 |
| GRP2 A/B | 650 | 320 | 950(A) 1145(B) |
| GRP3 | 750 | 400 | 1100 |
| GRP4 | 900 | 400 | 1295 |
| GRP5 | 900 | 535 | 1295 |

STANDARD DOUBLE DOOR RANGE

GRP6 & GRP7 have an integral GRP membrane floor. The rest of the standard double door range have an open base with a 100mm reinforced integral base flange for bolting to the preformed concrete base.



- Spring tower bolts for retaining the secondary door leaf in its closed position.

| Catalogue No | Width (mm) | Depth (mm) | Height (mm) |
|--------------|------------|------------|-------------|
| GRP06 | 1080 | 400 | 1280 |
| GRP07 | 1080 | 680 | 1280 |
| GRP08 | 1300 | 400 | 1250 |
| GRP09 | 1400 | 660 | 1515 |
| GRP10 | 1700 | 800 | 1600 |
| GRP11 | 2000 | 500 | 1600 |
| GRP12 | 2000 | 800 | 1600 |

WALK IN ROADSIDE RANGE

The Walk In range has an open base with a 100mm reinforced integral base flange for bolting to the preformed concrete base.

- 90° Hold Open Door Stays on each door.
- Spring tower bolts for retaining the secondary door leaf in its closed position.
- Lifting brackets fitted for mounting onto concrete base.



| Catalogue No | Width (mm) | Depth (mm) | Height (mm) |
|--------------|------------|------------|-------------|
| GRP13 | 2000 | 500 | 2000 |
| GRP14 | 2000 | 750 | 2000 |
| GRP15 | 2000 | 1000 | 2000 |
| GRP16 | 2000 | 1500 | 2000 |
| GRP17 | 2000 | 1750 | 2000 |
| GRP18 | 2000 | 2000 | 2000 |

PLEASE NOTE:

We are able to deliver fully built via pallet courier network and offloaded by others.

Walk In Range can also be delivered fully built with HIAB delivery and offload.

Please call to discuss options and prices.

Optional Extras:

Vents (230mm x 230mm)


Door Stays (Fitted as Standard on Walk In Range)

St/St 2 Point Locking

Lifting Brackets (Fitted as Standard on Walk In Range)

As all cabinets are bespoke please contact us for a quotation



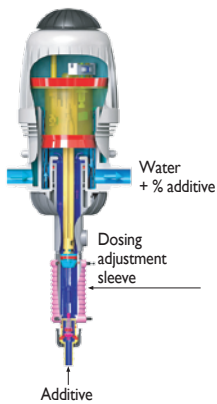

MixRite - simple, user friendly and ingenious water powered proportional dosing pump

Features

- Mixes additive and water precisely
- The dosage can be adjusted easily and quickly
- Repair is simple and inexpensive
- Key internal parts are from the highest quality material available (hastelloy spring, Viton Rubber seal)

Advantages

- Works at low flow rate
- Easy in field maintenance
- Highly chemical resistant
- Good blending
- Highly resistant to UV damage
- Easy to install
- No electricity needed
- Easy to adjust dosing rate
- Replaceable seals.

Free Phone App available to help calculate pump flow and dosing rates

TF 2.5 INJECTOR

- Flow Rates 0.007 - 2.5 m³/hr
- Pressure 0.2 - 8 Bar

| Catalogue No | In/Out BSP "M | Dosage in % | Price £ |
|--------------|---------------|-------------|---------|
| 9TF02-20 | 3/4 | 0.3-2.0 | 287.30 |

TF 3.5 INJECTOR

- Flow Rates 0.01-3.5 m³/hr
- Pressure 0.2 - 8 Bar

| Catalogue No | In/Out BSP "M | Dosage in % | Price £ |
|--------------|---------------|-------------|---------|
| 9TF03-09 | 3/4 | 0.1-0.9 | 310.30 |
| 9TF03-20 | 3/4 | 0.3-2.0 | |
| 9TF03-50 | 3/4 | 0.5-5.0 | |

TF 5 INJECTOR

- Flow Rates 0.2 - 5 m³/hr
- Pressure 1 - 8 Bar

| Catalogue No | In/Out BSP "M | Dosage in % | Price £ |
|--------------|---------------|-------------|---------|
| 9TF05-20 | 1 | 0.2-2.0 | 602.40 |
| 9TF05-50 | 1 | 1.0-5.0 | 770.00 |

TF 10 INJECTOR

- Flow Rates 0.5 - 10 m³/hr
- Pressure 1 - 8 Bar

| Catalogue No | In/Out BSP "M | Dosage in % | Price £ |
|--------------|---------------|-------------|---------|
| 9TF10-20 | 1 1/2 | 0.2-2.0 | 883.00 |
| 9TF10-50 | 1 1/2 | 1.0-5.0 | 910.10 |

TF 25 INJECTOR

- Flow Rates 2 - 25 m³/hr
- Pressure 1 - 8 Bar

| Catalogue No | In/Out BSP "M | Dosage in % | Price £ |
|--------------|---------------|-------------|---------|
| 9TF25-25 | 2 | 0.3-2.5 | 1081.80 |
| 9TF25-55 | 2 | 1-5.5 | 1139.10 |



TEFEN MixRite MEDICATORS

MixRite Medicators for Livestock Application

- Precise mixing of medication and water
- Easy and quick dosing adjustment
- Inexpensive and simple maintenance
- Highest quality quality material available
- Hastelloy spring Viton-rubber seal



| Catalogue No | Model | In/Out BSP M | Dosage in % | Price £ |
|--------------|--------|--------------|-------------|---------|
| 9TM01-08 | TF 2.5 | 3/4" | 0.8 Fix | 287.30 |
| 9TM02-20 | TF 2.5 | 3/4" | 0.3-2 | 287.30 |
| 9TM02-40 | TF 2.5 | 3/4" | 0.4-4 | 287.30 |
| 9TM03-20 | TF 3.5 | 3/4" | 0.3-2 | 385.30 |
| 9TM05-10 | TF 5 | 1" | 0.1-1 | 857.50 |

POULTRY

| Mixrite | Mixrite 2.5 | Mixrite 3.5 | Mixrite 3 |
|-------------------------|---------------------|-------------------|-----------|
| 0.8% Fix | 0.3-2% / 0.4-4% | 0.3-2% | 0.1-1% |
| * 8,000 to 50,000 Birds | *Up to 70,000 Birds | *More than 70,000 | |

* Birds size up to 9 pounds

PIGS

| Mixrite 2.5 | Mixrite 5 |
|--|--|
| 0.3-2% / 0.4-4% | 0.3-2% |
| Nursery minimum 450 pigs Finisher maximum 2000 pigs | Nursery minimum 500 pigs Finisher maximum 2500 pigs |





WATER STORAGE TANKS

Galvanised and corrugated steel water tanks, specifically designed to hold large volumes of water - from 9 m³/h to 200,000 m³/h. Evenproducts tanks are WRAS approved.

Evenproducts also hold ISO9001 quality management certification. Evenproducts tanks are extremely strong and designed with a safety factor of 1.4. Evenproducts tanks are easy to install and comes with a fully illustrated manual. Each tank is flat packed onto one size pallet for easy delivery, UK and globally.



TANKS AND LINERS

| Tank Size | | Nominal Capacity | | Tank Exc Liner | | PVC Liner | | EPDM Liner | | Side Fleece | |
|-------------|--------------|------------------|--------|----------------|----------|--------------|----------|--------------|----------|--------------|---------|
| Imp | Metric | Gallons | Litres | Catalogue No | Price £ | Catalogue No | Price £ | Catalogue No | Price £ | Catalogue No | Price £ |
| 9' x 2' 6" | 2.74 x 0.76 | 990 | 4550 | TK09/1 | 231.00 | TL09/1/050P | 181.70 | TL09/1/075E | 221.60 | TKFL09/1 | 23.00 |
| 9' x 5' | 2.74 x 1.52 | 1980 | 9100 | TK09/2 | 378.00 | TL09/2/050P | 220.50 | TL09/2/075E | 317.90 | TKFL09/2 | 38.80 |
| 9' x 7' 6" | 2.74 x 2.29 | 3000 | 13500 | TK09/3 | 535.50 | TL09/3/050P | 268.80 | TL09/3/075E | 413.20 | TKFL09/3 | 58.20 |
| 12' x 5' | 3.65 x 1.52 | 3530 | 16000 | TK12/2 | 504.00 | TL12/2/050P | 284.60 | TL12/2/075E | 371.10 | TKFL12/2 | 58.20 |
| 12' x 7' 6" | 3.65 x 2.29 | 5280 | 24000 | TK12/3 | 714.00 | TL12/3/050P | 340.20 | TL12/3/075E | 470.80 | TKFL12/3 | 87.30 |
| 12' x 10' | 3.65 x 3.04 | 7000 | 32000 | TK12/4 | 913.50 | TL12/4/050P | 427.40 | TL12/4/100E | 674.60 | TKFL12/4 | 112.90 |
| 15' x 7' 6" | 4.57 x 2.29 | 8250 | 37500 | TK15/3 | 882.00 | TL15/3/050P | 454.70 | TL15/3/075E | 628.10 | TKFL15/3 | 116.40 |
| 15' x 10' | 4.57 x 3.04 | 11000 | 50000 | TK15/4 | 1,144.50 | TL15/4/050P | 563.90 | TL15/4/100E | 887.40 | TKFL15/4 | 150.50 |
| 18' x 7' 6" | 5.48 x 2.29 | 11800 | 54000 | TK18/3 | 1,071.00 | TL18/3/050P | 577.50 | TL18/3/075E | 802.00 | TKFL18/3 | 116.40 |
| 18' x 10' | 5.48 x 3.04 | 15800 | 72000 | TK18/4 | 1,365.00 | TL18/4/050P | 717.20 | TL18/4/100E | 1,116.60 | TKFL18/4 | 150.50 |
| 21' x 5' | 6.4 x 1.52 | 10700 | 49000 | TK21/2 | 882.00 | TL21/2/050P | 577.50 | TL21/2/075E | 814.20 | TKFL21/2 | 97.00 |
| 21' x 7' 6" | 6.4 x 2.29 | 16180 | 73500 | TK21/3 | 1,239.00 | TL21/3/050P | 698.30 | TL21/3/075E | 991.40 | TKFL21/3 | 145.50 |
| 21' x 10' | 6.4 x 3.04 | 21500 | 98000 | TK21/4 | 1,648.50 | TL21/4/050P | 956.60 | TL21/4/100E | 1,363.60 | TKFL21/4 | 188.10 |
| 24' x 7' 6" | 7.31 x 2.29 | 21000 | 96000 | TK24/3 | 1,417.50 | TL24/3/050P | 913.50 | TL24/3/075E | 1,196.40 | TKFL24/3 | 173.70 |
| 24' x 10' | 7.31 x 3.04 | 28180 | 128000 | TK24/4 | 1,921.50 | TL24/4/050P | 1,125.60 | TL24/4/100E | 1,628.40 | TKFL24/4 | 225.80 |
| 30' x 7' 6" | 9.14 x 2.29 | 33000 | 150000 | TK30/3 | 1,848.00 | TL30/3/050P | 1,228.50 | TL30/3/075E | 1,655.00 | TKFL30/3 | 203.60 |
| 30' x 10' | 9.14 x 3.04 | 44000 | 200000 | TK30/4 | 2,478.00 | TL30/4/050P | 1,441.70 | TL30/4/100E | 2,211.10 | TKFL30/4 | 263.40 |
| 36' x 7' 6" | 10.06 x 2.29 | 47560 | 216000 | TK36/3 | 2,268.00 | TL36/3/050P | 1,572.90 | TL36/3/075E | 2,175.60 | TKFL36/3 | 232.70 |
| 36' x 10' | 10.06 x 3.04 | 63400 | 288000 | TK36/4 | 3,118.50 | TL36/4/050P | 1,835.40 | TL36/4/100E | 2,862.40 | TKFL36/4 | 301.00 |

Other sizes available up to 132' Diameter

TANK COVERS

| Tank Size | | Permeable Cover | | Woven PP Anti Algae Cover | | Steel Cover | |
|-----------|--------|-----------------|---------|---------------------------|----------|--------------|----------|
| Imp | Metric | Catalogue No | Price £ | Catalogue No | Price £ | Catalogue No | Price £ |
| 9' | 2.74 | 74C09-00 | 166.20 | TC09M | 314.00 | TC09G | 1,070.00 |
| 12' | 3.65 | 74C12-00 | 212.90 | TC12M | 373.30 | TC12G | 1,287.30 |
| 15' | 4.57 | 74C15-00 | 288.40 | TC15M | 481.80 | TC15G | 1,604.40 |
| 18' | 5.48 | 74C18-00 | 368.20 | TC18M | 556.70 | TC18G | 1,916.30 |
| 21' | 6.4 | 74C21-00 | 459.00 | TC21M | 639.40 | TC21G | 2,591.40 |
| 24' | 7.31 | 74C24-00 | 588.20 | TC24M | 773.70 | TC24G | 3,110.10 |
| 30' | 9.14 | 74C30-00 | 801.40 | TC30M | 1,003.50 | TC30G | 5,360.30 |
| 36' | 10.06 | 74C36-00 | 961.50 | TC36M | 1,320.00 | TC36G | 6,607.70 |



ENDURAMAXX TANKS



| Catalogue No | Size in Litres | Price £ |
|--------------|----------------|----------|
| TKXV02500 | 2500 | 431.00 |
| TKXV05000 | 5000 | 911.00 |
| TKXVI10000 | 10000 | 1,511.00 |
| TKXVI15000 | 15000 | 2,225.00 |
| TKXV30000 | 30000 | 4,382.00 |



HOLE CUTTING SERVICE

| Catalogue No | Size | Price £ |
|--------------|------|---------|
| 73-20-20 | 2" | 16.20 |
| 73-30-30 | 3" | 19.44 |

SILT / FILTER PIPE



| Catalogue No | Size | Length | Price £ |
|--------------|--------|--------|---------|
| 73-20-01 | 2" BSP | 1 mtr | 11.25 |
| 73-30-01 | 3" BSP | 1 mtr | 31.20 |

REPAIR KITS FOR LINERS

Prem Rep Kit Butyl/EPDM Liner c/w Quickseam Formflash Patch



| Catalogue No | Description | Price £ |
|--------------|---|---------|
| 73-60-10 | 230mmx250mm & 100ml tin Quickprime Plus | 22.40 |
| 73-60-20 | 230mm x 500mm + 125ml tin Quickprime Plus | 34.20 |

STEEL TANK TAKE OFF

| Catalogue No | Size | Price £ |
|--------------|------------|---------|
| 73-00-20 | 2" (50mm) | 77.50 |
| 73-00-30 | 3" (75mm) | 99.20 |
| 73-00-40 | 4" (100mm) | 187.00 |



PVC TANK OUTLET

See Page 33

HANSEN NYLON OUTLETS

See Page 21

HANSEN LEVELLER VALVE

HANSEN



Enables you to set a minimum and maximum water level when filling your tank with a pump.

Comes with adaptor for 1 1/4, 1 1/2 and 2"

| Catalogue No | Price £ |
|--------------|---------|
| 73-70-10 | 82.10 |

HANSEN LEVEL ALERT



Monitor Water Levels
See at a glance your tank water level.
Suitable for any type or size of tank
Essential part of your water management
Prevent Pump Burnout caused by Dry Tank Syndrome.

| Catalogue No | Price £ |
|--------------|---------|
| 73-72-20 | 126.50 |

HANSEN TANK VALVE



Each valve is supplied with Complete GRP Body,
Adjustable Extension Arm, 100mm Blue Flanged Float, 600mm Cord, Standard Hose Tail

| Catalogue No | Price £ |
|--------------|---------|
| 73-75-25 | 31.00 |
| 73-75-32 | 34.00 |

NEW

BRASS FLOAT VALVE WITH PLASTIC FLOAT



| Catalogue No | Size | Price £ |
|--------------|------|---------|
| 73-50-12 | 1/2" | 12.60 |
| 73-50-19 | 3/4" | 22.60 |
| 73-50-25 | 1" | 35.40 |

BRASS FLOAT VALVE WITH COPPER FLOAT



| Catalogue No | Size | Float Size | Price £ |
|--------------|--------|--------------|---------|
| 73-55-12 | 1/2" | 4.5" x 5/16" | 24.90 |
| 73-55-19 | 3/4" | 6" x 5/16" | 54.00 |
| 73-55-25 | 1" | 8" x 7/16" | 148.80 |
| 73-55-32 | 1 1/4" | 10" x 9/16" | 302.50 |
| 73-55-40 | 1 1/2" | 10" x 9/16" | 345.30 |
| 73-55-50 | 2" | 12" x 5/8" | 419.10 |

COPPER FLOAT



| Catalogue No | Description | Price £ |
|--------------|--------------|---------|
| 73-56-12 | 4.5" x 5/16" | 17.40 |
| 73-56-19 | 6" x 5/16" | 32.70 |
| 73-56-25 | 8" x 7/16" | 67.10 |
| 73-56-32 | 10" x 9/16" | 86.10 |
| 73-56-50 | 12" x 5/8" | 96.40 |

DROP ARMS FOR FLOAT VALVES (ARM ONLY)



| Catalogue No | Description | Price £ |
|--------------|---------------------|---------|
| 73-57-19 | For 3/4" | 40.10 |
| 73-57-25 | For 1" | 66.90 |
| 73-57-32 | For 1 1/4" & 1 1/2" | 95.50 |
| 73-57-50 | For 2" | 121.40 |

TANK BRACKET



| Catalogue No | Description | Price £ |
|--------------|---------------------|---------|
| 73-50-10 | For 1/2" - 1" | 15.90 |
| 73-50-11 | For 1 1/4" - 1 1/2" | 24.80 |

PVC COLLAPSIBLE WATER BUTT



| Catalogue No | Size in M Diam x Height | Capacity in Litres | Price £ |
|--------------|-------------------------|--------------------|---------|
| 77-10-02 | 0.6 x 0.7 | 200 | 48.60 |
| 77-10-04 | 0.8 x 0.8 | 400 | 57.30 |
| 77-10-10 | 1.2 x 0.9 | 1000 | 125.00 |

- Capture and store rainwater
- Strong and UV Resistant
- Includes filter, tap and overflow
- Collapse and store in winter

POLYTANKS



| Catalogue No | Size in Litres | Price £ |
|--------------|----------------|---------|
| TKPO201518 | 55 | 115.70 |
| TKPO202020 | 91 | 115.70 |
| TKPO242424 | 136 | 172.30 |
| TKPO392021 | 190 | 178.50 |
| TKPO462419 | 227 | 192.00 |
| TKPO642419 | 318 | 295.40 |
| TKPO642623 | 454 | 369.20 |

NEW





LINDEN



CYPRESS



WILLOW



JUNIPER



SEQUOIA



BIRCH



SPRUCE



REDWOOD

DECORATIVE FOUNTAINS



| Catalogue No | Description | Price £ |
|--------------|-------------------------------------|----------|
| KASEJF2400 | 1/2 hp Floating Decorative Fountain | 1,144.80 |
| KASEJF3400 | 3/4 hp Floating Decorative Fountain | 1,741.40 |
| KASEJF4400 | 1 hp Floating Decorative Fountain | 2,350.40 |

- 208-240 volt, 50 Hz
- 10 meter power cord

| Catalogue No | Description | Price £ |
|--------------|-----------------------------------|----------|
| KASEJF8400 | 2 hp Floating Decorative Fountain | 3,445.50 |
| KASHJF2-30 | 2 hp Floating Decorative Fountain | 3,518.30 |

- 8400EJF is 208-240 volt, 50 Hz, single phase
- 2.3EHJF000 is 380 Volt, 50 Hz, three phase
- stub cord option only

| Catalogue No | Description | Price £ |
|--------------|---------------|----------|
| KASEJFB3-10 | 3 hp Floating | 4,026.50 |
| KASHJF3-30 | 3 hp Floating | 4,013.60 |

- 3.1EJF is 208-240 volt, 50 Hz, single phase
- 3.3EHJF000 is 380 Volt, 50 Hz, three phase
- stub cord option only

| Part# | Horse Power | Voltage | Rampage | Watts | Min Depth Req | Linden Nozzle | | Cypress Nozzle | | Willow Nozzle | | Juniper Nozzle | | Redwood Nozzle | | Spruce Nozzle | | Sequoia Nozzle | | Birch Nozzle | |
|---------|-------------|-------------|----------|--------|---------------|---------------|------|----------------|-----|---------------|------|----------------|------|----------------|-----|---------------|-----|----------------|-----|--------------|-----|
| | | | | | | H | W | H | W | H | W | H | W | H | W | H | W | H | W | H | W |
| 2400EJF | 1/2 HP | 208-240V | 2.2 Amp | 484 w | 38 cm | 1.3 | 3.7 | 1.3 | 2.8 | 0.9 | 3.5 | 0.7 | 3.9 | NA | NA | NA | NA | 1.6 | 1 | NA | NA |
| 3400EJF | 3/4 HP | 208-240V | 3.8 Amp | 484 w | 38 cm | 2 | 6 | 1.8 | 5.3 | 1.4 | 5.3 | 1 | 6.9 | NA | NA | NA | NA | 2.2 | 1.5 | NA | NA |
| 4400EJF | 1 HP | 208-240V | 6.5 Amp | 1430 w | 49 cm | 3.4 | 7.3 | NA | NA | 2.4 | 7 | 1.8 | 8.8 | 4.9 | 1.5 | 4.1 | 3 | NA | NA | 2.6 | 1.8 |
| 8400EJF | 2 HP | 220 V, 1 PH | 9.5 Amp | 2090 w | 51 cm | 4.7 | 10.4 | NA | NA | 3.4 | 10.4 | 1.8 | 13.4 | 5.5 | 1.5 | 5.5 | 3 | NA | NA | 3.5 | 1.8 |
| 2.3EHJF | 2 HP | 380 V, 3 PH | 3.3 Amp | 2169 w | 51 cm | 4.7 | 10.4 | NA | NA | 3.4 | 10.4 | 1.8 | 13.4 | 5.5 | 1.5 | 5.5 | 3 | NA | NA | 3.5 | 1.8 |
| 3.1EJF | 3 HP | 220 V, 1 PH | 13.2 Amp | 2901 w | 61 cm | 4.1 | 9.8 | NA | NA | 3.6 | 8.2 | 2.7 | 12.2 | 6.1 | 0.9 | 5.8 | 2.1 | 4.6 | 3 | 3 | 4 |
| 3.3EHJF | 3 HP | 380 V, 3 PH | 5.0 Amp | 3287 w | 61 cm | 4.1 | 9.8 | NA | NA | 3.6 | 8.2 | 2.7 | 12.2 | 6.1 | 0.9 | 5.8 | 2.1 | 4.6 | 3 | 3 | 4 |

All dimensions are measured in metres



| Catalogue No | Description | Price £ |
|--------------|----------------|----------|
| KASAEAF2400 | 1/2 hp Aerator | 982.50 |
| KASAEAF3400 | 3/4 hp Aerator | 1,050.80 |
| KASAEAF4400 | 1 hp Aerator | 1,652.60 |



| Catalogue No | Description | Price £ |
|--------------|--------------|----------|
| KASAEAF8400 | 2 hp Aerator | 2,920.80 |
| KASAEHAF2.3 | 2 hp Aerator | 2,978.00 |



| Catalogue No | Description | Price £ |
|--------------|--------------|----------|
| KASAEAF3-I | 3 hp Aerator | 3,218.90 |
| KASAEHAF3-3 | 3 hp Aerator | 3,190.50 |

| PART# | HORSE POWER | VOLTAGE | AMPERAGE | WATTS | Min. Water Depth Required | Suggested Pond Size |
|---------|-------------|-------------|----------|---------|---------------------------|-----------------------|
| 3400EAF | 3/4 HP | 220 V | 3.4 Amp | 748 w | 45 cm | 3,000 m ² |
| 4400EAF | 1 HP | 220 V | 3.7 Amp | 814 w | 49 cm | 4,000 m ² |
| 8400EAF | 2 HP | 220 V, 1 PH | 8 Amp | 1,760 w | 51 cm | 8,000 m ² |
| 2.3EHAF | 2 HP | 380 V, 3 PH | 2.6 Amp | 1,709 w | 51 cm | 8,000 m ² |
| 3.1EAF | 3 HP | 220 V, 1 PH | 11.9 Amp | 2,618 w | 61 cm | 12,000 m ² |
| 3.3EHAF | 3 HP | 380 V, 3 PH | 4.1 Amp | 2,695 w | 61 cm | 12,000 m ² |

Halogen Light Packages Model LE275 and LE375

For use with all

Kasco Decorative and Aerating Fountains 1/2HP - 5HP

| Catalogue No | Description | Price £ |
|--------------|-------------|----------|
| KASLE275 | Economy | 1,173.60 |
| KASLE375 | Standard | 1,496.50 |

The LE-275 uses two of the solid bronze fixtures instead of three as in the other light kit option, which helps keep costs lower. The package includes two 75 watt MR-16 halogen bulbs to fully illuminate your Fountain pattern. The LE-275 Lighting Package is intended for use with the 2400EVFX, 2400EJF, 3400EVFX, and 3400EJF Floating Aerating Fountain models and includes all the mounting hardware to accompany those Floating Fountain models

Model LE375

Kasco's LE-375 Low Voltage Light Kit includes three 75 watt MR-16 halogen bulbs to fully illuminate your Fountain patterns. The LE-375 Lighting Package is designed for use with the 4400EVFX, 4400EJF, 8400EJF, 2.3EHJF, 3.1EHVFX, 3.3EHVFX, 3.1EHJF, 3.3EHJF, & 5.3EHJF Floating Aerating Fountain models, but can be used with any unit from 1/2HP and up. The LE-375 Lighting Package includes all mounting hardware needed. Additional brackets are available to give you the option of adding two sets of the LE-375 Lighting Package to any 2, 3, or 5HP Aerating Fountain for a brighter and more dramatic affect.



PRESSURE GAUGES

NOTES

GLYCERINE FILLED



63mm (2 1/2" dia) Pressure Gauges
Stainless steel case, brass internals
Bottom entry
1/4" BSP parallel thread

| Catalogue No | Range | Price £ |
|--------------|---------------------|---------|
| 76-05-02 | 0 - 2 BAR (30psi) | 9.00 |
| 76-05-04 | 0 - 4 BAR (60 psi) | |
| 76-05-07 | 0 - 7 BAR (100psi) | |
| 76-05-11 | 0 - 11 BAR (160psi) | |
| 76-05-14 | 0 - 14 BAR (200psi) | |



| Catalogue No | Range | Price £ |
|--------------|-------------------|---------|
| 76-07-07 | 0-7 Bar (100psi) | 9.00 |
| 76-07-11 | 0-11 Bar (160psi) | |

DRY



50mm (2" dia) Pressure Gauges
ABS case, brass internals
Bottom entry
1/4" BSP tapered thread

| Catalogue No | Range | Price £ |
|--------------|----------------------|---------|
| 76-10-02 | 0 - 2 BAR (30 psi) | 3.30 |
| 76-10-04 | 0 - 4 BAR (60 psi) | 4.20 |
| 76-10-07 | 0 - 7 BAR (100 psi) | |
| 76-10-11 | 0 - 11 BAR (160 psi) | 6.50 |
| 76-10-14 | 0 - 14 BAR (200 psi) | |



| Catalogue No | Range | Price £ |
|--------------|------------------------------|---------|
| 76-10-10 | Plastic Pressure Check Point | 4.20 |
| 76-50-00 | Needle for Pressure Gauge | 15.90 |

DILUTORS

MINI DILUTORS



| Catalogue No | Model | Size | Press in ATM | Flow Rate M ³ /hr | Dosage in % | Price £ |
|--------------|-------|-------|--------------|------------------------------|--------------|---------|
| 9VAILAD2L | AD2L | 9.3 L | 3 | 0.3 - 2.3 | 50:1 - 100:1 | 91.50 |
| 9VAILAD2H | AD2H | 9.3 L | 3 | 1.1 - 6.8 | 50:1 - 100:1 | 96.10 |
| 9VAILAD30 | AD3 | 6.5 L | 3 | 0.3 - 3.4 | 200:1 | 153.40 |